

SLASHERS


3'6FT / 4FT(45HP) / 5FT(45HP) / 5FT(75HP) / 6FT(75HP) SLASHER

Model Numbers :

3.6SLA40-2 (3'6ft) / 4SLA45-2 (4ft) / 5SLA45-2 (5ft) 5SLA75-2 (5ft) / 6SLA75-2 (6ft)

Our Slashers are ideal for clearing vegetation such as grass, weeds, scrub, small brush and saplings. The range has undergone years of testing and refinement, they are well built and competitively priced, with proven results.

(5ft 45HP Slasher depicted in image)

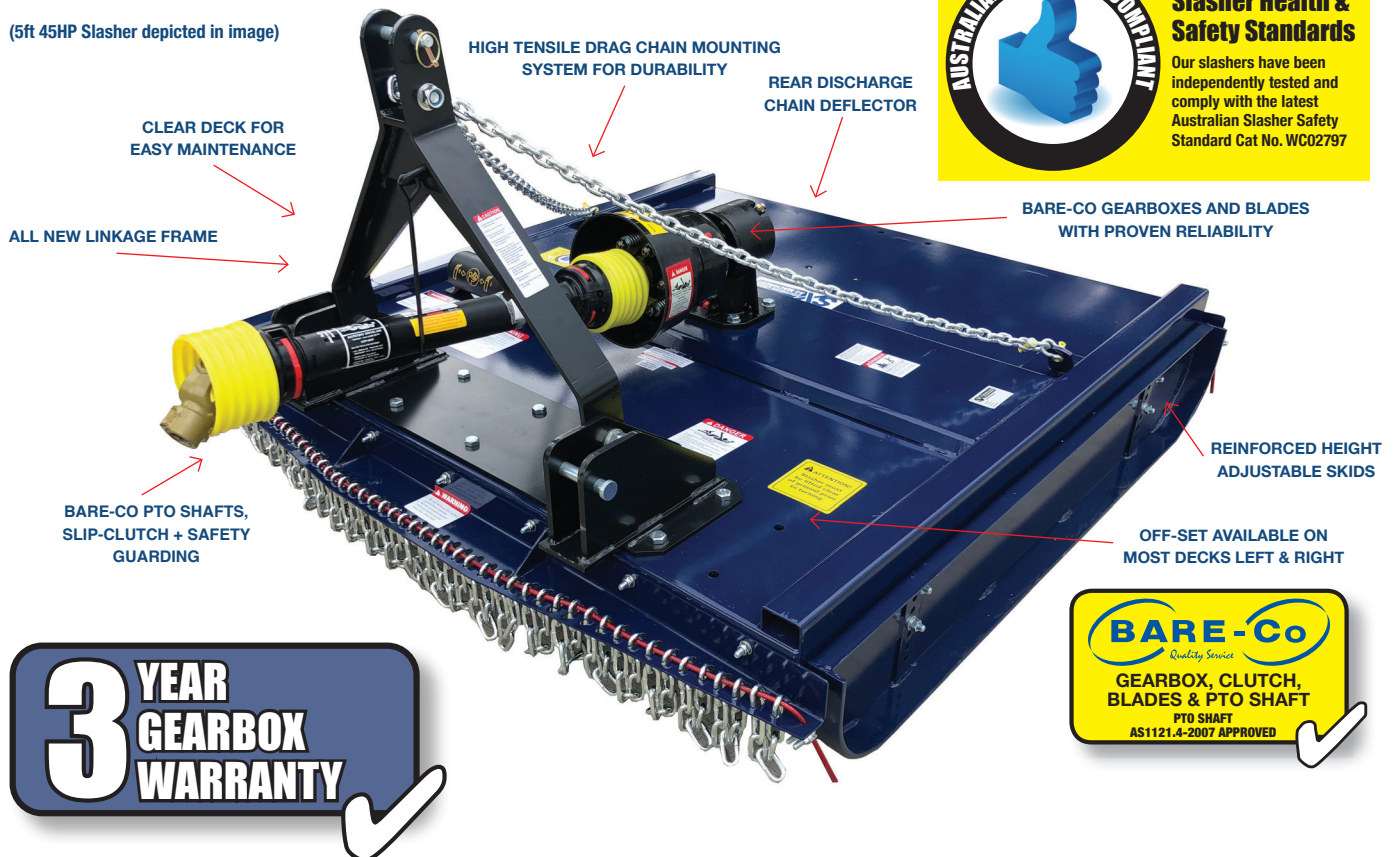

MODEL NUMBER	6SLA75-2	5SLA75-2	5SLA45-2	4SLA45-2	3.6SLA40-2
Recommended Tractor (HP)	50-75	35-75	30-45	18-45	16-40
Cutting Width (mm)	1750	1470	1470	1160	1058
Overall Width (mm)	1870	1650	1650	1350	1208
Cutting Height (mm)	42-167	42-167	30-116	30-116	30-116
Number of Blades	2	2	2	2	2
Blade Size (mm)	Bare-Co: B6002	Bare-Co: B6002	Bare-Co: B6002	Bare-Co: B6002	Bare-Co: B6002
Blade Tip Speed (m/s max.)	90	80	80	66	58
Deck Thickness (mm)	4.0	3.5	3.5	3.0	3.0
3-Point Hitch	Category One	Category One	Category One	Category One	Category One
Gear Box / Capacity	Bare-Co 1:1.93 / 75HP	Bare-Co 1:1.93 / 75HP	Bare-Co 1:1.93 / 45HP	Bare-Co 1:1.93 / 45HP	Bare-Co 1:1.93 / 45HP
PTO Driveline	Bare-Co 8 inch slip-clutch & series 6 PTO shaft	Bare-Co Series 6 PTO Shaft & 8" Slip-clutch	Bare-Co Series 4 PTO Shaft & 6" Slip-clutch	Bare-Co Series 4 PTO Shaft & 6" Slip-clutch	Bare-Co Series 4 PTO Shaft & 6" Slip Clutch
Grass Discharge	Rear Discharge	Rear Discharge	Rear Discharge	Rear Discharge	Rear Discharge
Blade Carrier System	Cutter Bar	Cutter Bar	Cutter Bar	Cutter Bar	Cutter Bar
Optional Wheel Kit(s)	Twin Kit Available	Single Kit Available	Single Kit Available	Single Kit Available	Single Kit Available
Offset	Left & Right	Left & Right	Left & Right	Not Available	Not Available

GALVANISED SLASHERS


4FT(45HP) / 5FT(75HP) / 6FT(75HP) / 6FT(100HP) GALVANISED SLASHER

Model Numbers :

4SLA45GAL-2 (4ft) / 5SLA75GAL-2 (5ft) / 6SLA75GAL-2 (6ft) / 6SLA100GAL-2 (6ft)

Southern Cross Slashers have been independently tested and comply with the latest Australian WorkCover Health and Safety Standards. They come standard with Bare-Co blades, gearbox, slip clutch, safety guarding and PTO shaft. The gearboxes come with a 3-year warranty and offer proven reliability.

(6ft Galvanised Slasher depicted in image. Image depicts optional jockey wheels)

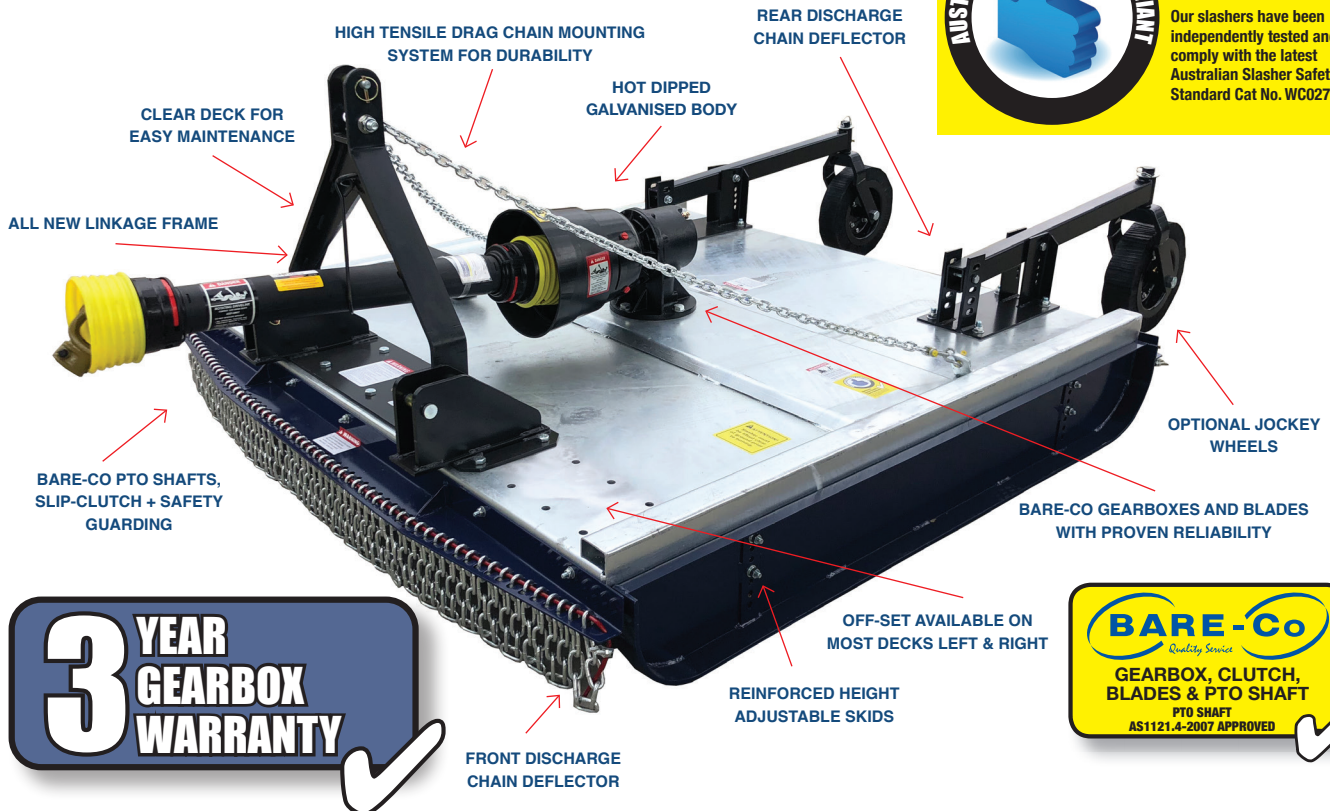

MODEL NUMBER	6SLA100GAL-2	6SLA75GAL-2	5SLA75GAL-2	4SLA45GAL-2
Recommended Tractor (HP)	50-100	50-75	35-75	18-45
Cutting Width (mm)	1750	1750	1470	1160
Overall Width (mm)	1870	1870	1650	1350
Cutting Height (mm)	42-167	42-167	42-167	30-116
Number of Blades	2	2	2	2
Blade Size (mm)	Bare-Co: B6002	Bare-Co: B6002	Bare-Co: B6002	Bare-Co: B6002
Blade Tip Speed (m/s max.)	90	90	80	66
Deck Thickness (mm)	5.0	5.0	4.0	4.0
3-Point Hitch	Category One	Category One	Category One	Category One
Gear Box / Capacity	Bare-Co 1:1.93 / 100HP	Bare-Co 1:1.93 / 75HP	Bare-Co 1:1.93 / 75HP	Bare-Co 1:1.93 / 45HP
PTO Driveline	Bare-Co 8 inch 100HP slip-clutch & series 8 PTO shaft	Bare-Co 8 inch slip-clutch & series 6 PTO shaft	Bare-Co 8 inch slip-clutch & series 6 PTO shaft	Bare-Co 6 inch slip-clutch & series 4 PTO shaft
Grass Discharge	Rear Discharge	Rear Discharge	Rear Discharge	Rear Discharge
Blade Carrier System	Cutter Bar	Cutter Bar	Cutter Bar	Cutter Bar
Optional Wheel Kit(s)	Twin Kit Available	Twin Kit Available	Single Kit Available	Single Kit Available
Offset	Left & Right	Left & Right	Left & Right	Not Available